



Volume Control for the Home.

Series 9000 Picture Window

Precision Mitered Fusion Welded Corners

provide superior structural strength and weather resistance

Beveled Frame Design

provides a stylish, hand-crafted exterior appearance

Integral, Pre-Punched Mounting Flange

targets proper fastener location for quick, easy install (block frame available for replacement applications)

Dual Concealed Drainage System


carries water away from the window while controlling air and dust penetration

Multi-Chamber Frame Design

improves thermal efficiency and helps enhance sound absorbency

Warm-Edge Insulated Glass

assembly improves acoustical and thermal performance and helps reduce condensation

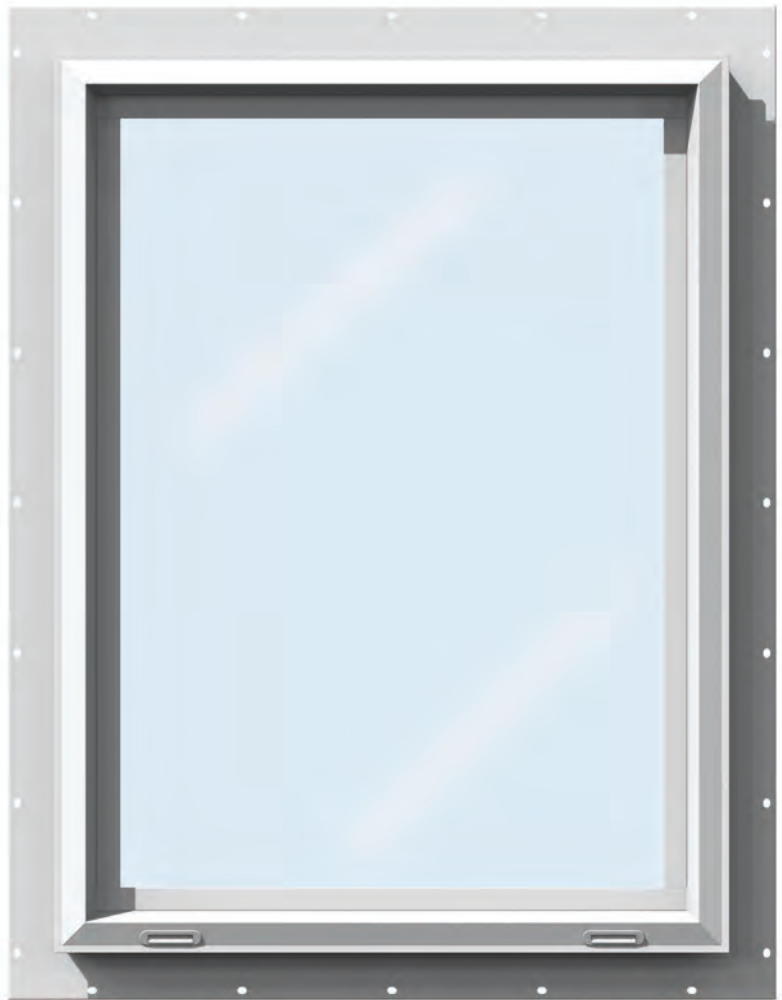

Color options:

White

Almond

Adobe

(actual colors may vary)

Inquire about cap stock color options.

Manufacturer reserves the right to substitute components as necessary for continued product improvement.

* Screens are not meant to restrain a child from falling through an open window.

Series 9000 Picture Window Performance Data

Air, Water, Structural & Forced Entry Performance:

Performance Class	FW-C45
Structural Load*	DP 45 (45.11 psf test pressure at 96" x 60" size) per ASTM E330
Water Resistance	15.04 psf per ASTM E
Air Infiltration	0.01 cfm/ft ² per ASTM E283
Forced Entry	Passed at Grade 10 per ASTM F588

*Performance reported for a single unit configuration at size indicated. Rating may vary for other sizes and configurations. Contact your sales representative for details.

Acoustic Performance:

Glazing Configuration	STC	OITC
1/8 - 1/8	30	25
3/16 - 1/8	33	28
1/4 Lami - 3/16	36	31

Thermal Performance:

Glazing Configuration	Glass Type	U-Factor	SHGC (wo/ grids)	SHGC (w/ grids)
1/8 - 1/8	Low E 272	0.33	0.36	0.33
	Low E 272 - Argon	0.29	0.36	0.33
	Low E 366	0.32	0.24	0.22
	Low E 366 - Argon	0.26	0.24	0.22
1/8 - 3/32	Low E 272	0.31	0.36	0.33
	Low E 272 - Argon	0.27	0.36	0.33
	Low E 366	0.32	0.24	0.22
	Low E 366 - Argon	0.26	0.34	0.22
3/16 - 1/8	Low E 272	0.33	0.36	0.32
	Low E 272 - Argon	0.29	0.36	0.32
	Low E 366	0.32	0.24	0.22
	Low E 366 - Argon	0.26	0.24	0.22
1/4 Lami - 3/16	Low E 272	0.32	0.41	0.37
	Low E 272 - Argon	0.28	0.41	0.37
	Low E 366	0.31	0.33	0.30
	Low E 366 - Argon	0.25	0.33	0.30

Series 9000 Picture Window Size Chart

(Custom net sizes also available in 1/8" increments. Contact your sales representative for details.)

Rough Opening	18"	24"	30"	36"	42"	48"	54"	60"	66"	72"
Exact Size	17.5"	23.5"	29.5"	35.5"	41.5"	47.5"	53.5"	59.5"	65.5"	71.5"
36"	1630	2030	2630	3030	3630	4030	4630	5030	5630	6030
42"	1636	2036	2636	3036	3636	4036	4636	5036	5636	6036
48"	1640	2040	2640	3040	3640	4040	4640	5040	5640	6040
54"	1646	2046	2646	3046	3646	4046	4646	5046	5646	6046
60"	1650	2050	2650	3050	3650	4050	4650	5050	5650	6050
66"	1656	2056	2656	3056	3656	4056	4656	5056	5656	6056
72"	1660	2060	2660	3060	3660	4060	4660	5060	5660	6060
78"	1666	2066	2666	3066	3666	4066	4666	5066	5666	6066
84"	1672	2072	2672	3072	3672	4072	4672	5072	5672	6072
90"	1678	2078	2678	3078	3678	4078	4678	5078	5678	6078
96"	1684	2084	2684	3084	3684	4084	4684	5084	5684	6084



12775 East 38th Avenue • Denver, CO 80239
303-375-1929 • 1-800-375-5570 • www.Silent-Guard.com